

The background of the advertisement is a high-temperature industrial setting, likely a steel mill, with bright orange and yellow flames and molten metal. In the foreground, various white ceramic fiber products are displayed, including several large spools of fiber, smaller spools, and several rolls of woven fabric. The overall scene conveys the high-temperature environment where these materials are used.

3M

**Nextel™
Textiles**

*Ceramic fiber
products for
high temperature
industrial applications.*

Physical Properties

3M™ Nextel™ Fabrics, Tapes, and Sleeveings are designed to meet demanding thermal, mechanical and electrical performance requirements, outperforming the useful limits of other high temperature textiles. Nextel 312 Ceramic Fibers and Nextel 440 Ceramic Fibers are continuous polycrystalline metal oxide fibers suitable for producing textiles without the aid of other fiber or metal inserts.

Low Shrinkage

Products fabricated from Nextel ceramic fibers exhibit very low shrinkage, providing excellent dimensional stability.

Abrasion Resistance

Nextel 312 fibers demonstrated excellent abrasion resistance after a 30-minute exposure at up to 2000°F (1093°C).

Thermal Mechanical Properties

Products made with Nextel 312 and Nextel 440 ceramic fibers retain greater strength and flexibility at higher temperatures than other refractory textile materials.

Thermal Insulation Properties

Nextel fiber products have excellent resistance to thermal shock, have low thermal conductivity and can be fabricated into excellent high temperature thermal insulators.

Non-hygroscopic

Nextel 312 fiber's smooth, non-porous surface only gains 0.08 percent of its weight after 2 hours exposure to 100 percent humidity.

Electrical Properties

The Nextel ceramic textile's high electrical resistance at elevated temperatures, low shrinkage and low moisture absorption characteristics make it an excellent choice for high temperature electrical insulation applications. Nextel fibers contain no residual acids or chlorides to leach out, which can cause etching of metal.

3M™ Nextel™ ceramic fibers maintain excellent flexibility even after continuous exposure to temperatures up to 2200°F.

Nextel can be used in numerous applications, including:

- Tube seals
- Thermocouples
- Horse-tail curtains
- Furnace curtains
- Heat shields
- Ladle covers
- Resistance wire supports
- Conveyor belts
- Expansion joints
- Furnace linings
- Delay table covers
- Seals and gaskets
- Zone dividers

Product Features:

- High temperature limits
- Flexible
- Sewable
- Cutable
- Low electrical conductivity
- High-Strength
- Resists shedding



Left, Heat Shield: The ceramic fabrics, tapes and sleeveings are able to be sewn and converted into an endless number of forms, including: heat shields to protect specific areas; pads for assisting transport of high-temperature material; and ropes for use as gasket material, or even as ties for securing an object within a high-temperature location.



Above, Pipe Wrap (adhesive tape): Pipes can be wrapped with ceramic tape to protect the pipe itself from failing when exposed to high temperature environments. Similarly, the ceramic wrap can help insulate a pipe carrying high temperature fluids. The low conductivity and electrical insulation offered by our ceramic tapes allow for innovative applications such as a beaded resistance wire, needed in processing petroleum products. The electrical current is protected from shorting to the steel pipe by the Nextel ceramic tape.



Above, Electrical Thermocouple: The Nextel Ceramic Textiles are useful for electrical applications because of their low conductivity characteristics. As a covering for thermocouple wire, the ceramic textile insulates the wiring and electronic components as well as offering heat protection.



Top, Furnace Curtains: Nextel Ceramic Fabric has been used as a furnace curtain to help maintain the interior temperatures both by keeping cold air outside and keeping the heat inside.


Middle, Zone Divider: Nextel Ceramic Fabric can allow some furnaces to run loads in different temperature ranges simultaneously. By dividing furnace capacity into zones and using our ceramic fabric to help maintain those varying environments, increased output could be realized.

Bottom, Furnace Liner: Nextel fabrics can help resolve shedding problems with soft-refractory furnace interiors. The furnace lining application represented here shows how ceramic fabric can be fastened to furnace walls and ceilings, helping to reduce dusting and improve product quality. The higher temperature capabilities of Nextel could extend the duration and viability of the interior insulation.



Above, Tube Seal: Nextel fabrics can help save money, resources and to increase the efficiency of operating a furnace. As a tube seal, the ceramic fabric covers the holes surrounding the tubes so the heat and environment within the furnace operate precisely and predictably. The flexibility of the ceramic fabric, and the design of this tube seal, allow the tubes to expand naturally, without disrupting the furnace environment.






Below, Door Gasket and Seals: The fabrics and sleeveings can be used for sealing furnace doors or other access panels, as well as for stuffing in and around gaps where high temperatures need to be maintained. The resilience and flexibility benefits of Nextel, even at high temperatures, makes the ceramic fabric an efficient, reliable solution.

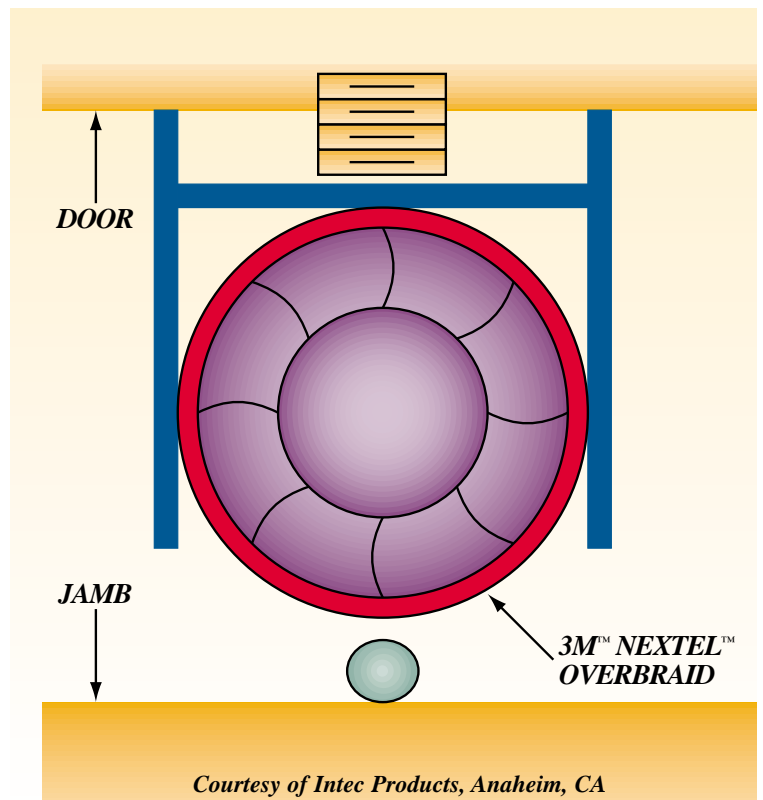

Courtesy of Intec Products, Anaheim, CA

| Property | Units | 3M™ Nextel™ 312 | Nextel 440 |
|---|-------------------|--|---|
| Use Temperature* | °F °C | 2200 1204 | 2500 1371 |
| Filament Diameter | µm | 10-12 | 10-12 |
| Crystal Size | nm | <500 | <500 |
| Crystal Type | | 9Al ₂ O ₃ :2B ₂ O ₃ + amorph. SiO ₂ | gamma Al ₂ O ₃ + mullite + amorph. SiO ₂ |
| Density | g/cm ³ | 2.70 | 3.05 |
| Filament Tensile Strength (25.4 mm gauge) | MPa ksi | 1700 250 | 2000 290 |
| Filament Tensile Modulus | GPa msi | 150 22 | 190 27 |
| Surface Area | m ² /g | <.2 | <.2 |
| Chemical Composition | wt% | 62 Al ₂ O ₃ 24 SiO ₂ 14 B ₂ O ₃ | 70 Al ₂ O ₃ 28 SiO ₂ 2 B ₂ O ₃ |
| Thermal Expansion (100-1100°C) | ppm/°C | 3 (25-500°C) | 5.3 |
| Dielectric Constant (@ 9.375 GHz) | | 5.2 | 5.7 |
| Refractive Index | | 1.570 | 1.616 |

*Application Dependent

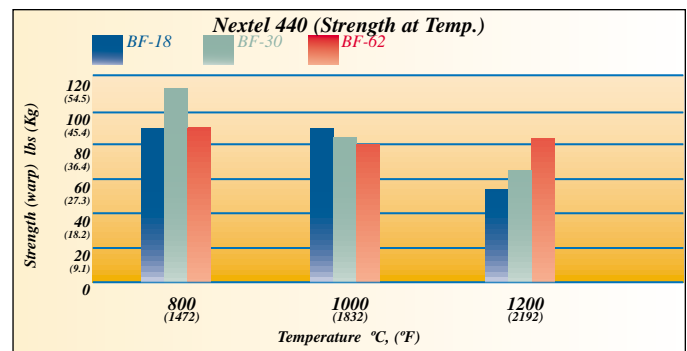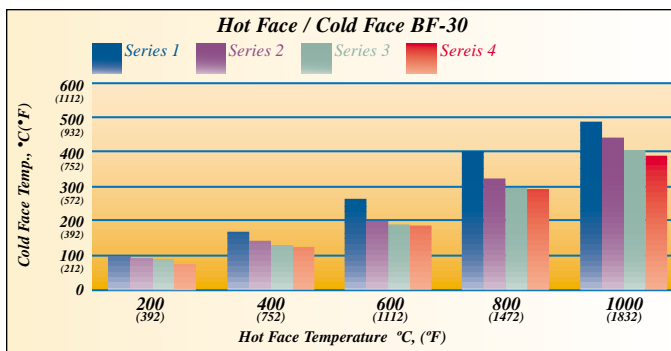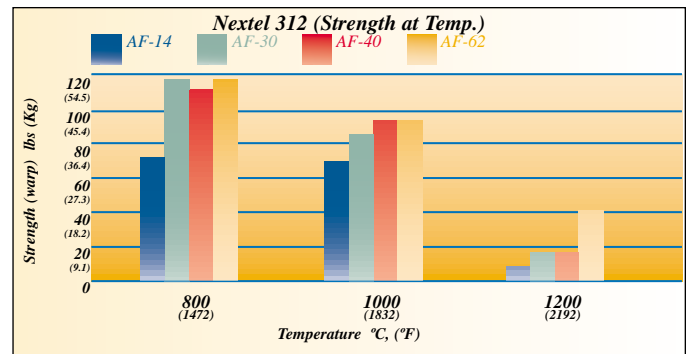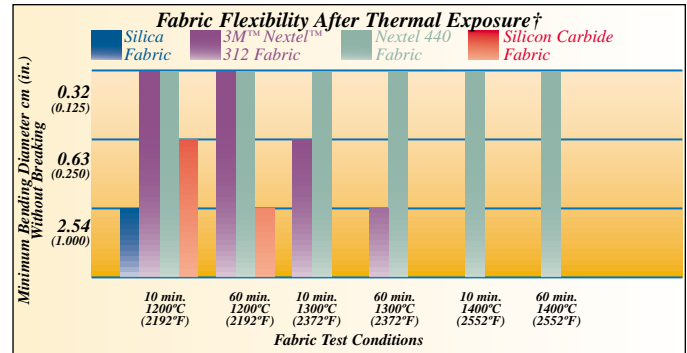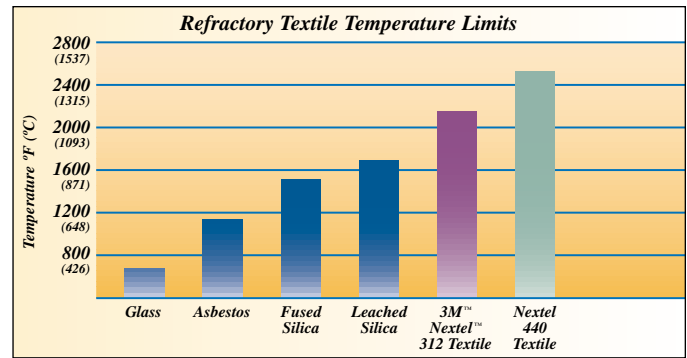

†Reprinted from the SAMPE Quarterly, Vol. 17, No. 1, October 1985. Strength and Flexibility Properties of Ceramic Fabrics, Paul M. Sawko and Huy Kim Tran.

IMPORTANT NOTICE TO PURCHASER:

3M MAKES NO WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. All statements, technical information and recommendations contained in this brochure are based upon tests conducted with 3M approved equipment and are believed to be reliable. However, many factors beyond the control of 3M can affect the use and performance of 3M Ceramic Fibers in a particular application, including the conditions under which the product is used. Since these factors are uniquely within the user's knowledge and control, it is essential the user evaluate the 3M Ceramic Fibers to determine whether this product is fit for the particular purpose and suitable for user's application.

LIMITATION OF REMEDIES AND LIABILITY: If the 3M product is proven to be defective THE EXCLUSIVE REMEDY, AT 3M'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR REPLACE THE DEFECTIVE 3M PRODUCT. 3M shall not otherwise be liable for any injury, losses or damages, whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including tort, contract, negligence, warranty, or strict liability.

Armortec™ is a registered trademark of Intec Products, Inc., Anaheim, CA



Ceramic Fiber Products

3M Center, Building 207-1W-11
St. Paul, MN 55144-1000
800/328-1687

Recycled paper.
40% pre-consumer
10% post-consumer
Issued: 4/97